

# **SLIMPRO**

- ✓ The smallest footprint on the market thanks to its vertical slicing system (less than 60cm wide)
- ✓ Slice thickness from 5mm to 25mm
- Choice of the number of slices. Per slice, by half-loaf or whole loaf
- ✓ Maximum safety
- ✓ Ultimate hygiene
- √ Stainless or painted steel finish
- ✓ Oil-free cutting

From 110 to 130 slices / minute



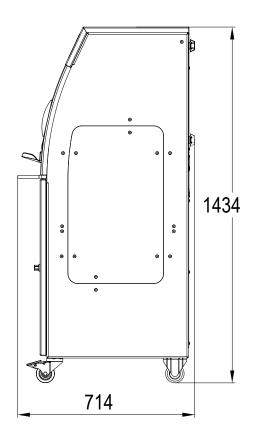

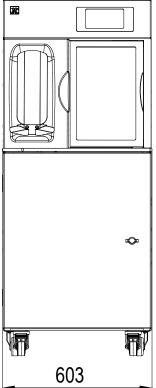





## Automatic claw

Stabilizes the loaf during slicing and makes handling safer

- Ergonomic
- User friendly
- Efficiency



Teflon-coated circular blade

Non-stick for the clean cutting of all types of bread.



#### Touch screen

Quick and easy to use.
Allows the user to choose the thickness and number of slices

- From 5mm to 25 mm
- Per slice, by half-loaf or whole loaf









Safety cover Locked during the cutting cycle, prevents access to the blade.

This offers maximum security and totally non existing accident risks.

SLIM

42 x 25 x 16

1,1 230V 1ph

210

From 5 to 25\*

Ø 260 Teflon coated

\* Thickness to be determined according to the type of bread.



Vertical bagger

For easier positioning and packaging of the loaf.



## Can slice any type of bread

- Breads to 42cm long, 25cm wide and 16cm (20cm) high
- Warm breads
- Breads with dense, sticky or ventilated crumbs



#### Easier interventions

Blade changing is easy by using a dedicated mode accesible via the touch screen that gives an access to the blade via the front of the machine.

When the slicer detects an error preventing further slicing cycle, the touch screen helps you to solve the problem didactically and independently.



# **CHOICES**

Cleaning mode

**FEATURES** 

Power supply Net weight in kg

Touch screen Lighted cutting area

Slice thickness in cm

Total motor power in kW

Blade type and diameter in cm

Size of entry channel (L x W x H) in cm

Standard colour (not compatible with stainless steel exterior)\*\*

## **OPTIONS**

51 115115	
Stainless steel exterior	•
Bag holder	•
Storage space for bags	•
Wood case packing	•
Special colour (not compatible with stainless steel exterior)	•