





- Versatile
- Fast: Adjustable speed from 120 to 240 slices / minute
- Easy: Intuitive touch screen
- Design: Full stainless steel or painted steel finish
- Maximum safety
- Exemplary hygiene

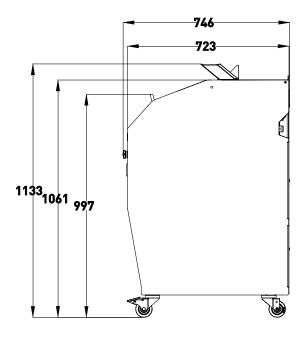

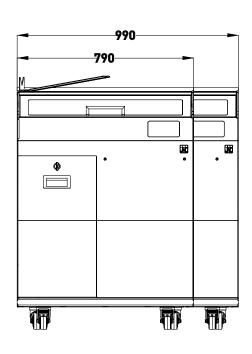

Best-in-class slicing performances for a wide range of bread



Smooth and quiet for all breads

- New engine generation designed for maximum precision on a wide range of breads, without lubrication
- Soft start and stop function



Adjustable speed up to 240 slices/ minute

In order to reach the fastest possible speed for each bread type

Teflon coated circular blade

Developed to cut through a large variety of breads; from soft to dense, with a hard crust, and even sticky

Planetary blade drive

- Fluid blade movement, avoids back-and-forth shakes
- Robust solution for long-term mechanical reliability

State-of-the-art ergonomics



Touch screen interface

Clear and simple interface, for an immediate and intuitive use



Multi-positions adjustable bagging spade Rotating spade, above cutting

- chamber, to optimize ergonomics and hygiene
- Two standard (left and right) bagging spade positions
- Or non-rotating front position (option)



Manual grip

- For all kinds of breads, including sharp ends
- Allows to minimize last slice width



Upper cover

- Prevents objects placed on the machine (e.g. bags) to be pushed inadvertently behind the machine when opening the front cover
- Rotates for easy cleaning



Automatic grip (option)

Just place the bread and the machine does the rest while you continue to serve your customers



Easy to access power switch

Accessible from the front of the machine, but not visible; avoids operations by a non-authorized person





Safe and clean environment



Maximum safety

- Highest safety standards, for machine use by consumers and staff
 The blade cannot run when the
- machine is not 100% locked



Smooth and cleanable surfaces

- Internal architecture designed to channel bread crumbs to an easily accessible crumb tray
- Flat surfaces (without recess around)



Anti-pinch design

Users cannot inadvertently pinch their fingers in the front cover sliders

Make it your own

Exterior



4 colours available as standard



Full stainless steel (structure and outer panels) (option)



Choice of any color to match your own store themes (option)

Accessories to enhance staff and consumer experience



Clip box (option)



Front bagging stand (option)



Bag holder (option)

Features

VARIA PRO 800	VARIA PRO 1000
38 x 34 x 16	49 x 34 x 16
Can be set from 4 to 30mm	Can be set from 4 to 30mm
220V single-phase	220V single-phase
0.75	0.75
230	250
•	•
•	•
420 mm diameter, Teflon-coated	420 mm diameter, Teflon-coated
•	•
•	•
•	•
•	•
•	•
•	•
	38 x 34 x 16 Can be set from 4 to 30mm 220V single-phase 0.75 230 . 420 mm diameter, Teflon-coated .

*STANDARD COLOURS

Front bagger stand







RAL 9005



RAL 9006



RAL 9010

